


ISO automatic shutter stop

Automatic shutter stop for external insulation

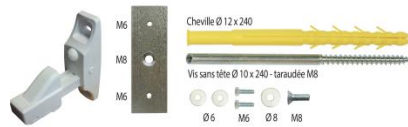

Arrêt de volet auto ISO


Description

- Automatic shutter stop for external insulation.
- For wooden, aluminum or PVC shutters.
- Contents: 2 automatic shutter stops, 2 Ø12 x 240 plugs, 2 Ø10 x 240 double thread screws, 2 TF M8 screws, 2 Ø8 washers, 4 TH M6 screws, 4 Ø6 washers and 2 plates.
- Drilling: Ø10 mm in hollow materials, Ø11 mm in solid materials.
- Maximum insulation: 110 mm in hollow materials, 160 mm in solid materials.


Product benefits

- The shutter locks itself in the shutter stopper.
- Rubber stopper preventing the shutter from being damaged.
- Adjustable: For shutters 20 to 50 mm thick.
- All materials and ideal for hollow materials.
- Made in France.
- In hollow materials, expansions on several cells of the support.
- 100% polyamide 6 nylon plug.
- Anti-rotation fins.

Materials

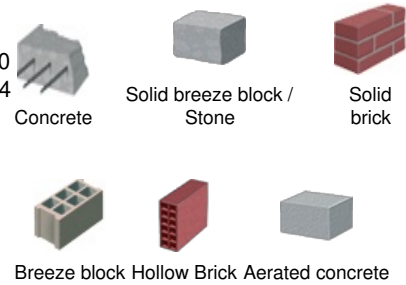

Arrêt de volet auto ISO - vue en situation



Arrêt de volet auto ISO - vue en coupe

Références produits

DÉSIGNATION	RÉFÉRENCE	CONDT	SURCONDT	COLOR
ARRET VOLET AUTOMATIQUE ISO BLANC Sachet de 2	A130210	Sachet de 2	5 sachets	Blanche
ARRET VOLET AUTOMATIQUE ISO NOIR Sachet de 2 ---	A130215	Sachet de 2	5 sachets	Noire