

Metal frame fixing

Fixing door/window frames

Description

- Metal frame fixing in steel for fixing wooden, metal and PVC door/window frames.
- Drill hole Ø 10 mm.

Product benefits

- Quick and easy.
- Mounting through the part to be affixed without any deformation.
- Can be used to close a gap of up to 45 mm between the frame and wall.

Homologations



Fire resistance

Materials



Concrete



Solid breeze block /
Stone



Solid
brick



Cheville toge



Cheville toge


Références produits

DÉSIGNATION	RÉFÉRENCE	CONDT	LENGTH
CHEVILLE TOGE 10/ 72 Bte de 50 xxx	A243110	Boîte de 50	72 mm
CHEVILLE TOGE 10/ 92 Bte de 50 xxx	A243120	Boîte de 50	92 mm
CHEVILLE TOGE 10/112 Bte de 50 xxx	A243130	Boîte de 50	112 mm
CHEVILLE TOGE 10/132 Bte de 50 xxx	A243140	Boîte de 50	132 mm
CHEVILLE TOGE 10/152 Bte de 50 xxx	A243150	Boîte de 50	152 mm
CHEVILLE TOGE 10/182 Bte de 50 xxx	A243160	Boîte de 50	182 mm

Technical informations - Average indicative loads (kg)

	TENSION	SHEAR
CONCRETE	170 kg	50 kg
STONE / SOLID BREEZE BLOCK	170 kg	50 kg

Technical informations - Characteristics

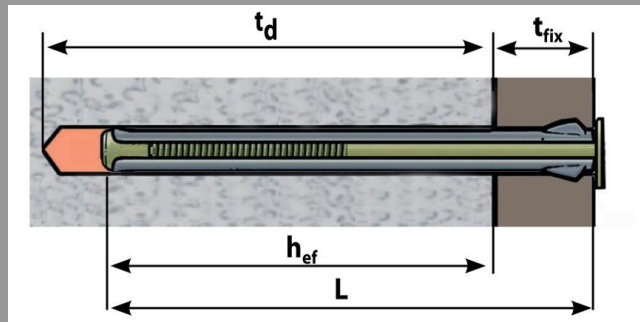

PLUG ($\varnothing \times L$)	TFIX	TD	HEF
$\varnothing 10 \times 72$	22 mm	50 mm	30 mm
$\varnothing 10 \times 92$	42 mm	50 mm	30 mm
$\varnothing 10 \times 112$	62 mm	50 mm	30 mm
$\varnothing 10 \times 132$	82 mm	50 mm	30 mm
$\varnothing 10 \times 152$	102 mm	50 mm	30 mm
$\varnothing 10 \times 182$	132 mm	50 mm	30 mm

Technical information - Utilisation

