

## Resin DSMax

### Styrene-free methacrylate resin approved for all application



Résine DSMax 300 ml

#### Description

- Styrene-free methacrylate resin approved for all application.
- Colours: beige, grey and white.
- Supplied with 2 mixing nozzles.

#### Product benefits

- Styrene-free.
- Can be filled in dry holes, wet holes and flooded holes without friction loss.
- Can be laid in ceilings without any accessories.
- Reduced drilling diameter (e.g.: drilling Ø 22 mm for M20 threaded rod).
- For M8 to M24 threaded rods in concrete.
- Insertion depth 6 to 12 times the diameter.
- For repairing reinforcing steel bars 8 to 12.
- For masonry M6 to M12.

#### Uses


- Fixing in tunnels, crash barriers, noise barriers, Railing, scaffolding, metal girders, bridge cranes, joists, signs, portals, shutter hinges, joist hangers, awnings, water heating systems, air-conditioning units, plumbing fixtures, antenna, angle brackets for cladding etc.

#### Homologations



ETE 20/1254.  
ETE 22/0494.  
ETE 20/1253.  
LEED, A+.  
Fire-resistant.  
Can be used in clean water.

#### Materials

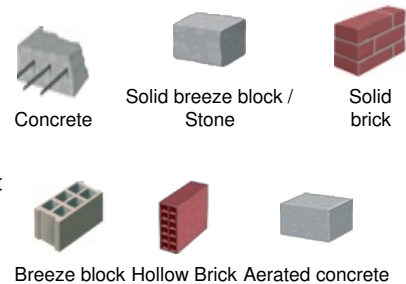

#### Références produits

DÉSIGNATION	RÉFÉRENCE	CONDT	COLOR	QTY	SURCONDIT
RESINE ING 300 ML DS MAX BEIGE La cartouche (carton 6)	A050028	Carton de 6	Beige	300 ml	Aucun
RESINE ING 300 ML DS MAX BEIGE La cartouche (carton 12)	A050030	Carton de 12	Beige	300 ml	Aucun
RESINE ING 300 ML DS MAX GRISE La cartouche (carton de 6)	A050145	Carton de 6	Grise	300 ml	Aucun
RESINE ING 300 ML DS MAX GRISE La cartouche (carton de 12)	A050147	Carton de 12	Grise	300 ml	Aucun
RESINE ING 300 ML DS MAX BLANCHE La cartouche (carton de 6)	A050150	Carton de 6	Blanche	300 ml	Aucun
RESINE ING 300 ML DS MAX BLANCHE La cartouche (carton de 12)	A050155	Carton de 12	Blanche	300 ml	Aucun

DÉSIGNATION	RÉFÉRENCE	CONDT	COLOR	QTY	SURCONDIT
RESINE 300 ML DS MAX BEIGE CAVALIER	A859820	Unité	Beige	300 ml	5 cartouches
KIT 300 ML DS MAX GRISE + TIGES FILET. D 10 X 160	A860034	1 kit	Grise	300 ml	5 kits
KIT 300 ML DS MAX BEIGE + TIGES FILET. D 10 X 160	A860035	1 kit	Beige	300 ml	5 kits
KIT DS MAX BEIGE 300ML + 4 TIGES FILETEES M8 X 160	A862030	1 kit	Beige	300 ml	5 kits

### Technical informations - average indicative loads (kg)

	Ø 6	Ø 8	Ø 10	Ø 12	Ø 16	Ø 20	Ø 24
HOLLOW MASONRY	100	100	100	100	100	100	100
CONCRETE	800	1050	1250	1700	2200	2500	3000

Refer to ATE

### Technical informations - Drying time and time until fixing can be loaded

TEMPÉRATURE	HANDLING TIME	TIME UNTIL FIXING CAN BE LOADED
0 °C À 10 °C	20 min	90 min
10 °C À 20 °C	9 min	60 min
20 °C À 30 °C	5 min	30 min
30 °C À 40 °C	3 min	20 min

Store at a temperature between 5°C and 25°C.  
For wet and flooded holes, double the loading time.

### Technical informations - Utilisations

